


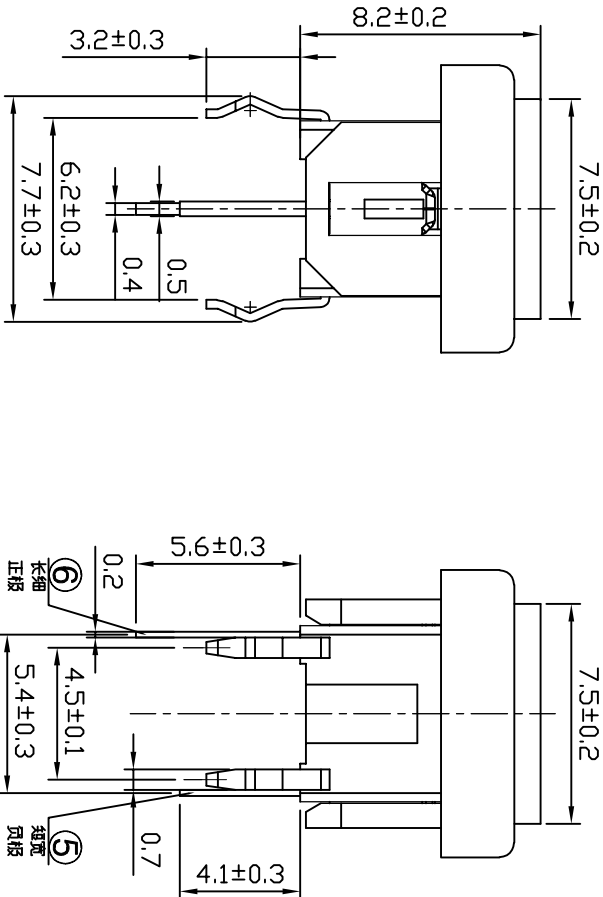


本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

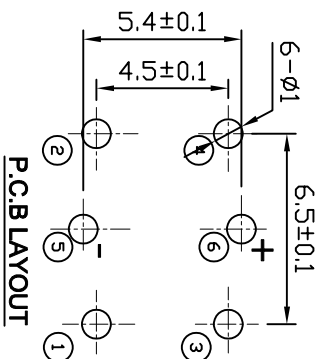

CIRCUIT

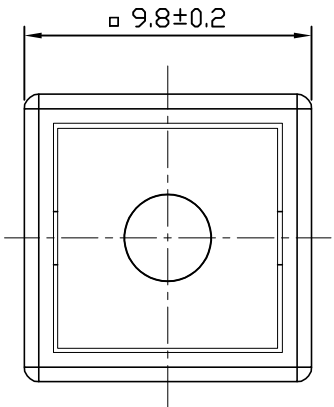

P.C.B. LAYOUT

SPECIFICATIONS:

Operating temperature range: -25°C to +75°C
Rating: 30V DC, 30mA
Insulation resistance: 100MΩ min. 100V DC
Dielectric strength: 250V.AC. 1min
Contact resistance: 50mΩ Max
Life: 100,000 Cycles
Travel: 0.25±0.1mm
Operating force: 160±50gf

F	灯光	灯光代码
	白光	W/ white
G	红光	R Red
	绿光	G Green
H	黄光	Y Yellow
	蓝光	BL Blue
..	..	



RÖHS COMPLIANT Pb-free RoHS				Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE				DESIGN	DATE	TITLE	
UNLESS OTHERWISE STATED				WYJ	2024.06.20	Illuminated Switch	
XX	±0.20	SIZE	A4	CHKD	DATE	MODEL	LSP644-082J-R
XXX	±0.15	REV	A				
XXX	±0.10	UNIT	mm	APPD	DATE	SHEET	1/3
✓	±2°	SCALE	4:1			PRINT DATE	2025.02.11