

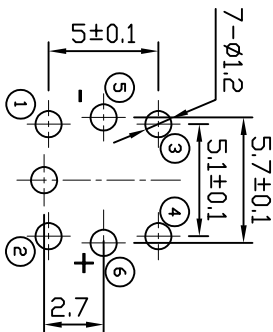
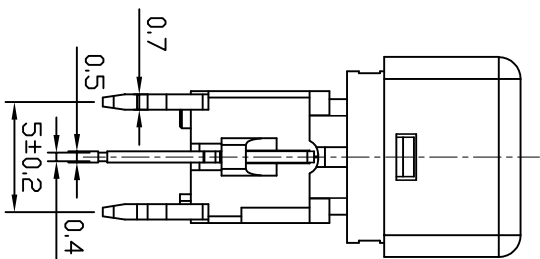




本公司智慧财产未经许可不得复制
ming biao copyright may not be used without permission from ming biao.

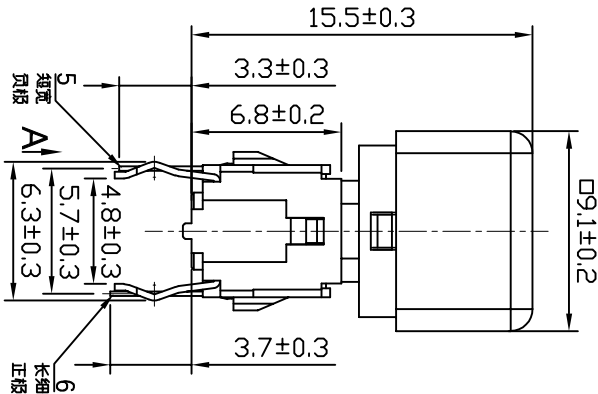

P.C.B LAYOUT



CIRCUIT

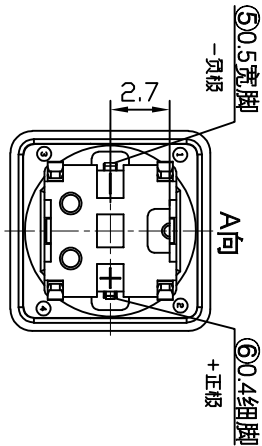

SPECIFICATIONS:

Operating temperature range:-25℃to+75℃
Rating:30V DC, 30mA
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V. AC. 1Min
Contact resistance:50mΩ Max
Life:100, 000 Cycles
Travel:0. 25±0. 1mm
Operating force:160±50gf

F	灯光代码	灯光代码
	白光	W white
	红光	R Red
G	绿光	G Green
	黄光	Y Yellow
H	蓝光	BL Blue
	..	



R&D BIAO COMPLIANT Pb-free RoHS Ming Biao				东莞市铭标电子科技有限公司 Ming Biao Electronic Technology Co., Ltd.			
TOLERANCE UNLESS OTHERWISE STATED				DESIGN DATE	DATE	TITLE	ILLUMINATED Switch
X.X	±0.20	SIZE	A4	CHKD	DATE	MODEL	LSP666-155J-R
X.XX	±0.15	REV	A	APPD	DATE	SHEET	1/3
X.XXX	±0.10	UNIT	mm	SCALE	3:1	PRINT DATE	2025.02.11